
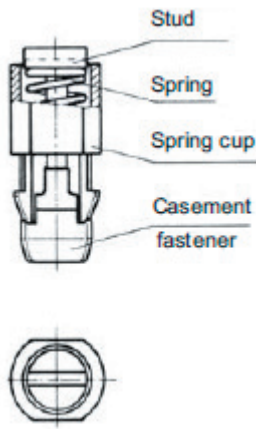

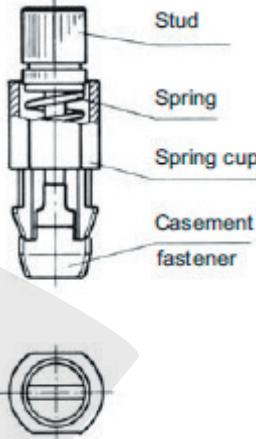
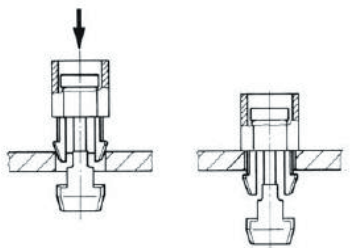



Style	Dimensions	Materials / Finish	°C	Part N°
Slotted Recess Head 		Spring cup: Plastic(POM) Stud: Steel/nickel-plated Spring: Steel/zinc-plated, CrVI-free, clear chromate Casement fastener: Zinc die casting/zinc-plated, CrVI-free, clear chromate	-25 up to +90	LOPMBTLS-*PNZ
Knurled head 		Spring cup: Plastic(POM) Stud: Steel/nickel-plated Spring: Steel/zinc-plated, CrVI-free, clear chromate Casement fastener: Zinc die casting/zinc-plated, CrVI-free, clear chromate	-25 up to +90	LOPMBTLK-*PNZ

Design and colour as requested by the customer. Due to the various front panel thickness, holes hapes and modular bars hapes, it is not possible to offer one standard design. We will individually issue the final part number only after determining the front panel and modular bar dimensions and the colour.

Dimensions	Fastener position
Installing the Fastener  1.Insert fastener with spring cup in to hole. 2.Push stud until snap-in hooks lock in.	Unlocked Locked  To lock push stud and turn 90°C The slot indicates the position of the fastener.