


CP156

CLAMPING SCREWS

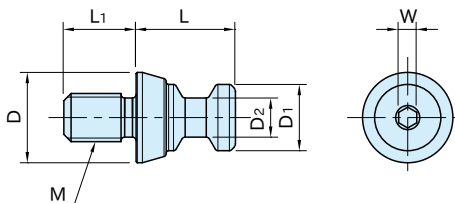


Body
SCM435 steel
Quenched and tempered
Black oxide finished

Part Number	M	L ₁	D	L	D ₁	D ₂	W	Weight (g)	CLAMPING MODULES
CP156-06001	M 6×1	8	11	10	8	4.8	2.5	5	CP150-06025, CP151-06050 CP152-06032
CP156-08061	M 6×1	9	15	16.5	11	6.5	3	13	CP150-08040, CP151-08080 CP152-08050
CP156-08001	M 8×1.25	12						16	
CP156-12081	M 8×1.25	12	24	25	16	9.5	5	46	CP150-12063, CP151-12125 CP152-12080
CP156-12001	M12×1.75	18						57	
CP156-16121	M12×1.75	18	31	33	21	13	6	108	CP150-16080, CP151-16160 CP152-16100
CP156-16001	M16×2	22						125	

How To Use

- Can be used for mounting [CP151](#) Clamping Module (Double) on the fixture plate.
- Can be installed on the workpiece.
- No locating function.
- Spacing tolerance of the tapped holes should be ± 0.2 .

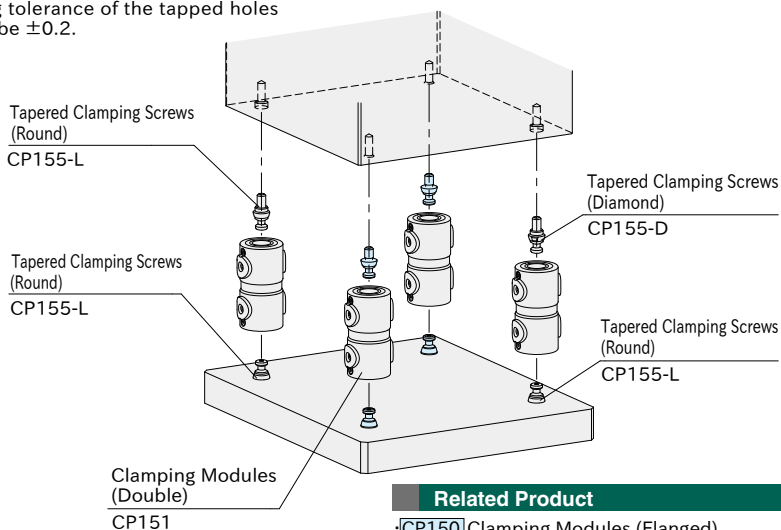

Related Product

- [CP150](#) Clamping Modules (Flanged)
- [CP151](#) Clamping Modules (Double)
- [CP152](#) Clamping Modules (Single)
- [CP155-L](#) Tapered Clamping Screws
- [CP155-D](#) Tapered Clamping Screws

Note

Contact us for customization.