


**Pneumatic Swing Clamp  
Threaded Body Model-Right Swing**

- Body Thread for precise cylinder height positioning
- Threaded port connection
- Available with two Flange Nuts

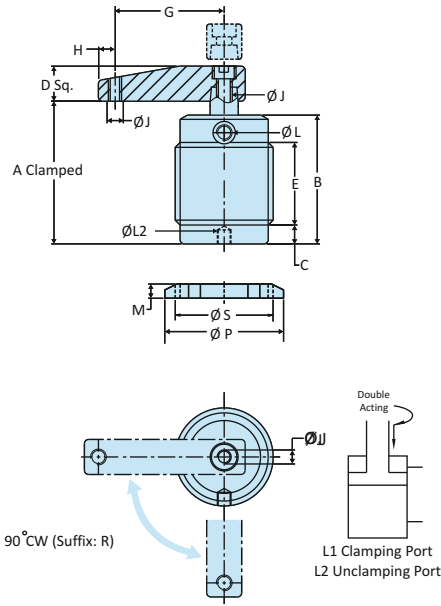


Material	Aluminum Alloy Body
Finish	Black Anodizing
Acting Type	Double Acting
Force	16 - 140 kgs
Total Stroke	28 - 30 mm
Working Pressure	4 - 7 Bar
Swivel Angle	90° ±2°

Model No	Weight Kgs	Dimensions																
		Piston Dia.	Bore Dia.	Swing Stroke	Clamping Stroke	Force in Kgs (5 kg/cm <sup>2</sup> )	A Clamped	B	C	D	E	G	H	J	L	M	P	S
SC-25-PT-R	0.800	14	25	14	14	16	76	70	10	16	35	50	6	M8x1.25	M5x0.8	9	58	M40 x 1.5
SC-32-PT-R	1.100	16	32	14	16	30	83	79	13	19	40	60	9	M8x1.25	G1/8	11	70	M50 x 1.5
SC-40-PT-R	1.250	16	40	14	15	50	87	83	13	19	45	70	9	M8x1.25	G1/8	11	75	M55 x 1.5
SC-50-PT-R	1.700	20	50	14	14	85	92	87	13	25	50	80	10	M12x1.5	G1/8	12	85	M65 x 1.5
SC-63-PT-R	2.200	20	63	15	15	140	97	92	13	25	56	90	10	M12x1.5	G1/8	15	105	M80 x 1.5

**Pneumatic Swing Clamp  
Threaded Body Model-Left Swing**

- Body Thread for precise cylinder height positioning
- Threaded port connection
- Available with two Flange Nuts

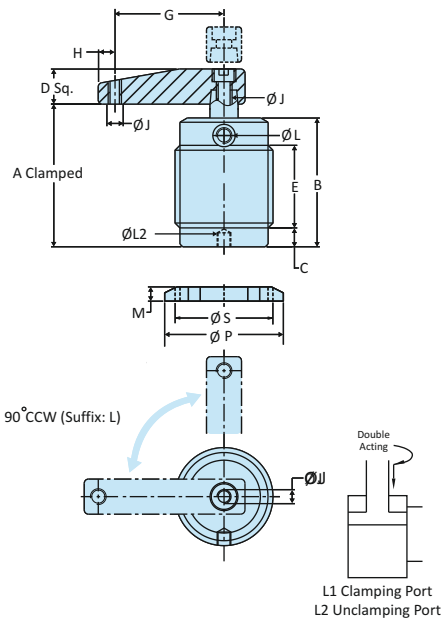

Material	Aluminum Alloy Body
Finish	Black Anodizing
Acting Type	Double Acting
Force	16 - 140 kgs
Total Stroke	28 - 30 mm
Working Pressure	4 - 7 Bar
Swivel Angle	90° ±2°

Model No	Weight Kgs	Dimensions																
		Piston Dia.	Bore Dia.	Swing Stroke	Clamping Stroke	Force in Kgs (5 kg/cm <sup>2</sup> )	A Clamped	B	C	D	E	G	H	J	L	M	P	S
SC-25-PT-L	0.800	14	25	14	14	16	76	70	10	16	35	50	6	M8x1.25	M5x0.8	9	58	M40 x 1.5
SC-32-PT-L	1.100	16	32	14	16	30	83	79	13	19	40	60	9	M8x1.25	G1/8	11	70	M50 x 1.5
SC-40-PT-L	1.250	16	40	14	15	50	87	83	13	19	45	70	9	M8x1.25	G1/8	11	75	M55 x 1.5
SC-50-PT-L	1.700	20	50	14	14	85	92	87	13	25	50	80	10	M12x1.5	G1/8	12	85	M65 x 1.5
SC-63-PT-L	2.200	20	63	15	15	140	97	92	13	25	56	90	10	M12x1.5	G1/8	15	105	M80 x 1.5