



## HTC-Series


## Medium/Heavy Duty-Low Height

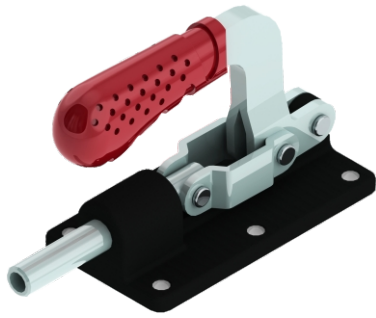


Model No. HTC-2040-LH

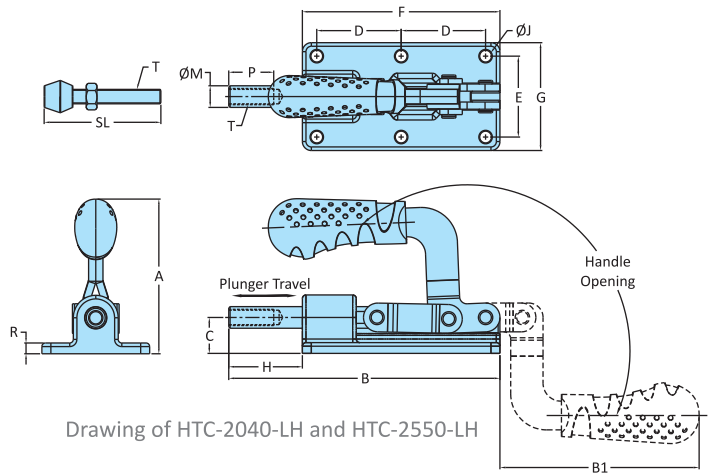


Drawing of HTC-2040-LH and HTC-2550-LH

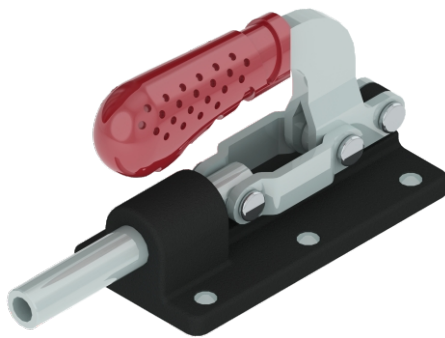


Model No. HTC-2550-LH

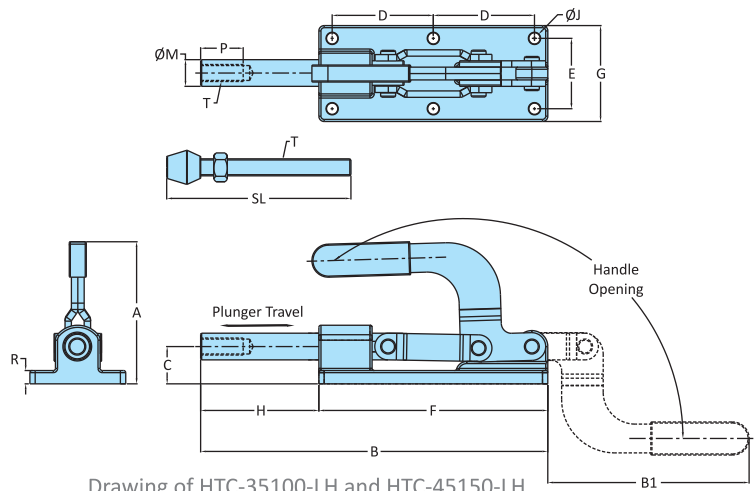

Drawing of HTC-35100-LH and HTC-45150-LH

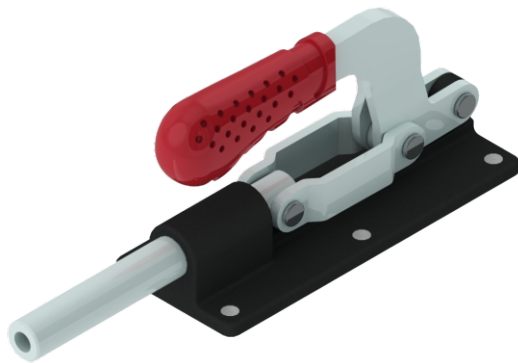

Model No. HTC-3075-LH

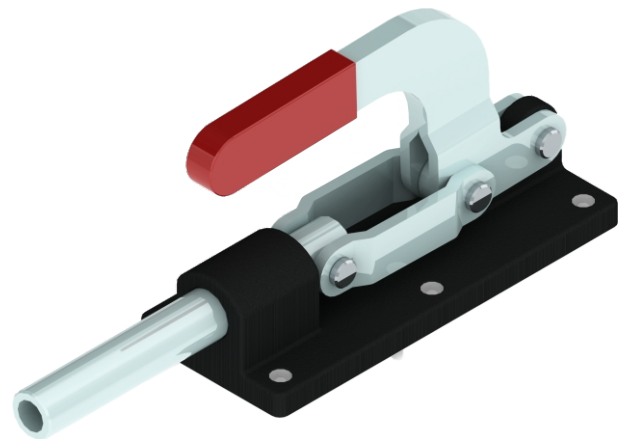

Model No. HTC-35100-LH

| Model No.    | Material | Finish      | Base Type    | Spindle Assembly | Plunger Travel | Holding Capacity |
|--------------|----------|-------------|--------------|------------------|----------------|------------------|
| HTC-2040-LH  | Steel    | Zinc Plated | Flanged Base | RT-865-1N        | 40             | 5.90 kN          |
| HTC-2550-LH  | Steel    | Zinc Plated | Flanged Base | RT-1085-1N       | 50             | 7.80 kN          |
| HTC-3075-LH  | Steel    | Zinc Plated | Flanged Base | RT-12115-1N      | 75             | 11.80 kN         |
| HTC-35100-LH | Steel    | Zinc Plated | Flanged Base | RT-16170-1N      | 100            | 19.60 kN         |
| HTC-45150-LH | Steel    | Zinc Plated | Flanged Base | RT-16170-1N      | 150            | 40.00 kN         |

| Model No.    | Weight Kgs | Handle Opening | Dimensions |     |     |    |      |    |     |    |     |      |    |    |      |          |     |
|--------------|------------|----------------|------------|-----|-----|----|------|----|-----|----|-----|------|----|----|------|----------|-----|
|              |            |                | A          | B   | B1  | C  | D    | E  | F   | G  | H   | J    | M  | P  | R    | T        | SL  |
| HTC-2040-LH  | 0.720      | 182°           | 86         | 151 | 111 | 20 | 47   | 45 | 110 | 60 | 41  | 6.5  | 12 | 30 | 6    | M8x1.25  | 66  |
| HTC-2550-LH  | 1.280      | 181°           | 89         | 186 | 122 | 25 | 52   | 48 | 130 | 65 | 56  | 8.5  | 16 | 30 | 8    | M10x1.50 | 86  |
| HTC-3075-LH  | 2.570      | 182°           | 106        | 277 | 166 | 30 | 82.5 | 55 | 184 | 75 | 93  | 8.5  | 20 | 40 | 10   | M12x1.75 | 116 |
| HTC-35100-LH | 4.330      | 182°           | 133        | 326 | 189 | 35 | 95   | 66 | 215 | 90 | 111 | 10.5 | 25 | 40 | 12.5 | M16x2.00 | 173 |
| HTC-45150-LH | 5.440      | 181°           | 141        | 464 | 216 | 45 | 75   | 50 | 250 | 80 | 155 | 10.5 | 25 | 40 | 12   | M16x2.00 | 173 |